Port of Newcastle Operations Pty Ltd 19-Dec-2019 Doc No. 60620229-RPNV-03_0

Mayfield Concept Plan

Annual Noise Verification Review (2019)

Mayfield Concept Plan

Annual Noise Verification Review (2019)

Client: Port of Newcastle Operations Pty Ltd

ABN: 97 539 122 070

Prepared by

AECOM Australia Pty Ltd Level 21, 420 George Street, Sydney NSW 2000, PO Box Q410, QVB Post Office NSW 1230, Australia T +61 2 8934 0000 F +61 2 8934 0001 www.aecom.com ABN 20 093 846 925

19-Dec-2019

Job No.: 60620229

AECOM in Australia and New Zealand is certified to ISO9001, ISO14001 AS/NZS4801 and OHSAS18001.

© AECOM Australia Pty Ltd (AECOM). All rights reserved.

AECOM has prepared this document for the sole use of the Client and for a specific purpose, each as expressly stated in the document. No other party should rely on this document without the prior written consent of AECOM. AECOM undertakes no duty, nor accepts any responsibility, to any third party who may rely upon or use this document. This document has been prepared based on the Client's description of its requirements and AECOM's experience, having regard to assumptions that AECOM can reasonably be expected to make in accordance with sound professional principles. AECOM may also have relied upon information provided by the Client and other third parties to prepare this document, some of which may not have been verified. Subject to the above conditions, this document may be transmitted, reproduced or disseminated only in its entirety.

Quality Information

Ref 60620229-RPNV-03_0

Date 19-Dec-2019

Prepared by Phillip Du

Reviewed by Patrick Martinez

Revision History

Rev	Revision Date	Details	Authorised		
			Name/Position	Signature	
A	19-Dec-2019	Draft for client's comments	Simon Murphy IAP Team Leader		
0	19-Dec-2019	Final	Simon Murphy IAP Team Leader	li	

Table of Contents

Abbrevia	ations	5				
Glossar	y .	5				
Docume	ent References	5				
1.0	Introduction					
	1.1 EPA Noise Policy for Industry	7				
2.0	Objectives	8				
3.0	Individual Project Review and Results	10				
	3.1 Approach	10				
	3.2 Individual Project, Predicted Operational Noise Levels	10				
	3.2.1 Project 1 – Stolthaven Bulk Liquids Fuel Storage Facility (Stolthaven)	10				
	3.2.2 Project 2 – Mayfield Cargo Storage Facility (Cargo Storage Facility)	11				
4.0	Overall Mayfield Concept Plan Noise Levels	13				
	4.1 Approach	13				
5.0	Discussion and Recommendations 14					
6.0	Conclusion	15				
Append	ix A					
	Acoustic Terminology	Α				

List of Tables

Table 1	Mayfield Concept Plan amenity noise goals at nearby residences	8
Table 2	Individual project predicted noise emission verification review	12
Table 3	Cumulative compliance noise verification review	13

List of Figures

9

Abbreviations

AS	Australian Standard
AS/NZS	Australian/New Zealand Standard
CENMT	Cumulative Environmental Noise Management Tool
СоА	The Minister for Planning's Conditions of Approval
DGM	Digital ground model
DP&E	Department of Planning and Environment
EA	Environmental Assessment
EPA	NSW Environment Protection Authority
EP&A Act	Environmental Planning and Assessment Act
EPL	Environment Protection Licence
GIS	Geographic Information System
INP	NSW Industrial Noise Policy
MCP	Mayfield Concept Plan
NPfl	Noise Policy for Industry
NVMP	Noise Verification Monitoring Plan
OEMP	Operation Environmental Management Plan
ONMP	Operation Noise Management Plan
PON	Port of Newcastle Operations Pty Ltd
SoundPLAN	SoundPLAN noise modelling software

Glossary

Project	An individual development within the MCP and falls part of the MCP approval.
Noise Quota	The noise goals for an individual project site within the MCP.

Document References

Document	Reference Document	Revision
Mayfield Concept Plan Noise Verification Monitoring Plan	60437494-RPNV-01_C	Revision C - 15 October 2015
Mayfield Concept Plan Cumulative Noise Modelling – User Guide	60289391.RPT01.01 MCP Noise User Guide	Revision 01 – 15 July 2015
Stolthaven Bulk Liquids Fuel Storage Facility, Mayfield - Operational Noise Compliance Assessment (2019)	60326869-RPNV-08_0	Revision 0 – 20 December 2019
Mayfield Cargo Storage Facility, Mayfield – Operational Noise Compliance Assessment (2019)	60620229-RPN-02_0	Revision 0 – 20 December 2019

1.0 Introduction

A concept approval (Application 09_0096) under Section 75O of the *Environmental Planning and Assessment Act 1979* (EP&A Act) was granted by the Minister for Planning on 16 July 2012 for the Mayfield Concept Plan (MCP) site (latest modification 12 December 2014). The MCP conditions of approval (CoA) require the consideration of the cumulative noise impacts from existing and future projects. Port of Newcastle Operations Pty Ltd (PON) has developed a Cumulative Environmental Noise Management Tool (CENMT) to assess and manage existing and future noise emission from individual project and cumulative noise impacts from the MCP area.

PON has developed a Noise Verification Monitoring Plan (NVMP) for the MCP, in order to monitor and review both individual project noise emissions against the issued noise quota, and to then review the cumulative of operational noise impacts from the overall MCP area.

AECOM Australia Pty Ltd (AECOM) was commissioned by PON to undertake this year's (2019) annual noise verification review of the MCP.

This verification review has been prepared to satisfy the MCP concept approval acoustic requirements, specifically condition **2.20 Noise Verification Monitoring Program**, which requires monitoring and reporting operational noise emissions.

The MCP CoA noise goals are limited to the assessment of noise emissions over NSW Environmental Protection Authority (EPA) NSW Industrial Noise Policy (INP) *amenity* periods. For other regulatory acoustic requirements, e.g. EPA Environment Protection Licence (EPL) noise limits, noise compliance assessments for the individual projects will incorporate these where required in their approval conditions.

Noise emissions as part of the short term 15-minute period INP intrusive noise assessment and sleep disturbance impacts are addressed at an individual project level. Therefore, these do not currently form part of PON's noise management of the MCP area.

As per Section 1.6 of the MCP approval, noise emissions associated with the berths, berthing or harbour operations (i.e. shipping activities) are excluded from contributing to the overall MCP noise emissions.

As per Section 1.14 of the MCP approval, Mayfield No. 4 Berth is excluded from the MCP area as it operates under an existing approval (Consent Condition DA-293-08-00 MOD 9, dated 29 August 2013) and has noise limit requirements as part of this consent condition. As such PON has undertaken a separate noise compliance assessment for Mayfield No. 4 Berth.

During this year's (2019) annual noise verification review of the MCP, there were two approved operational project within the MCP.

- Project 1 Stolthaven Bulk Liquids Fuel Storage Facility (Stolthaven); and
- Project 2 Mayfield Cargo Storage Facility (Cargo Storage Facility).

Acoustic terminology used in this report is included in Appendix A.

1.1 EPA Noise Policy for Industry

The NSW Industrial Noise Policy (EPA 2000) was withdrawn in November 2017 and replaced by the Noise Policy for Industry (EPA 2017) except as describe in the NSW EPA document Implementation and transitional arrangements for the Noise Policy for Industry (2017), point 8, as presented below:

8. The NSW Industrial Noise Policy (2000) will continue to apply where it is referenced in existing statutory instruments (such as consents and licences), except for the NSW Industrial Noise Policy Section 4 modifying factors, which will be transitioned to the Noise Policy for Industry (2017) Fact Sheet C through a NSW Industrial Noise Policy application note. This approach has been taken because the Noise Policy for Industry (2017) modification factor approach reflects more recent understanding of the impact of tonal and low-frequency noise on the community.

2.0 Objectives

As outlined in the MCP Noise Verification Monitoring Plan (NVMP), the individual project tenants are responsible for undertaking the verification noise assessments against the PON issued noise quotas.

PON is then responsible for collating and reviewing the individual project's noise verification and compliance assessments. In addition, PON is responsible for combining the outputs from these compliance assessments to determine the overall noise emission from the entire MCP site.

The MCP CoA requires that the overall operational noise levels associated with the MCP '*must comply* with the amenity noise goals at sensitive residential receivers'. The amenity noise goals applicable to the entire MCP are presented in Table 1.


	MCP Project Specific Noise Goals (dB(A)) L _{Aeq,}					
Noise Verification Location	Day (7.00 am to 6.00 pm)	Evening (6.00 pm to 10.00 pm)	Night (10.00 pm to 7.00 am)			
A - 1 Arthur Street, Mayfield (Urban)	60	49	43			
B - 2 Crebert Street, Mayfield (Urban)	60	50	43			
C – 32 Elizabeth Street, Carrington (Urban)	57	44	45			
D – Stockton (Suburban)	55	37	37			


Table 1 Mayfield Concept Plan amenity noise goals at nearby residences

The above noise goals apply under winds of up to three metres per second (measured at 10 metres above ground level) and Pasquill stability class from A to F.

The locations of the residential noise verification locations are presented in Figure 1.

AECOM

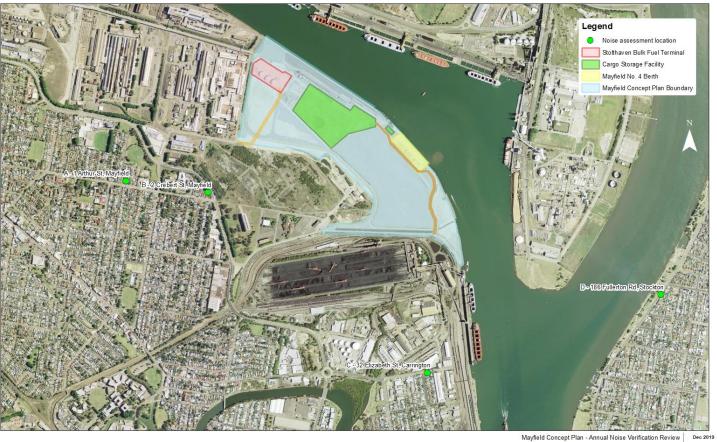





3.0 Individual Project Review and Results

3.1 Approach

As per the requirements of the MCP NVMP, individual projects have undertaken annual noise verification assessments (through the use of the *SoundPLAN Verification Model*) and these were provided to PON to undertake the annual noise verification review of the MCP.

These noise verification assessments address the operational noise emissions against the project's noise quota levels that were issued and approved by PON. These individual project noise compliance assessments have been reviewed by PON for adequacy against the requirements of the *Mayfield Concept Plan Cumulative Noise Modelling – User Guide (Modelling User Guide).*

All projects have been modelled using the *SoundPLAN Verification Model* issued for the 2019 individual project noise verification assessments. The noise emissions from all projects are based upon 'reasonable' worst case operational scenarios that occurred over the 2019 review period, in accordance with the approach for reviewing the performance of noise emissions from industrial facilities in NSW, as per Chapter 11 of the EPA INP.

3.2 Individual Project, Predicted Operational Noise Levels

PON has developed and implemented a Cumulative Environmental Noise Management Tool (CENMT) to manage individual MCP's project noise emission requirements. Table 2 presents a summary of the predicted noise emission levels at each of the assessment receiver locations for each of the approved projects within the MCP. The results presented in Table 2 indicate the projects' noise emission performance against the PON issued noise quotas. These predicted noise levels are for the highest noise impacts under all assessment meteorological conditions.

During this year's (2019) annual noise verification review of the MCP, there were two approved operational projects within the MCP.

- Project 1 Stolthaven Bulk Liquids Fuel Storage Facility (Stolthaven); and
- Project 2 Mayfield Cargo Storage Facility (Cargo Storage Facility).

3.2.1 Project 1 – Stolthaven Bulk Liquids Fuel Storage Facility (Stolthaven)

Stolthaven has four approval/license documents that currently control its operations, these documents are:

- The NSW Environment Protection Authority (EPA) issued Environment Protection Licence No. 20193 (EPL 20193), License version date 14 September 2018;
- State Significant Development (SSD) 7065 15 December 2016;
- State Significant Development (SSD) 6664 16 April 2015 (as modified); and
- Mayfield Concept Approval (MCP) (Application 09_0096) dated 16 July 2012 (latest modification 12 December 2014).

Note that Stolthaven is currently transitional between SSD 6664 and SSD 7065 approvals.

It is noted that project specific noise quotas were not issued as part of the Stolthaven SSD 6664 MOD 1 submission. However, as part of Stolthaven Stage 3 (SSD 7065) Environmental Impact Statement, noise quotas were allocated to the Stolthaven Stage 3 development, which includes Stolthaven current operations.

Therefore, for the purpose of assessing Stolthaven's current noise emission against the requirements of the MCP; this project was assessed against the noise quotas allocated to the Stolthaven Stage 3 (SSD 7056), refer to Table 2.

3.2.2 Project 2 – Mayfield Cargo Storage Facility (Cargo Storage Facility)

The Cargo Storage Facility specific noise quotas were provided by PON as part of the development's Statement of Environmental Effects (SEE). The noise quotas were derived using the MCP CENMT and are presented in Table 2.

Table 2 Individual project predicted noise emission verification review

		Projects Co	ompliance Noi	se Emission I	Review					
Project No. / Description	Noise Verification	fication Larg period dB(A)			Predicted Noise Level, L _{Aeq, period} dB(A)			Compliance		
	Location	Day	Evening	Night	Day	Evening	Night	Day	Evening	Night
	А	47	36	30	24	23	23	Yes	Yes	Yes
Project 1	В	51	40	34	33	31	31	Yes	Yes	Yes
Stolthaven	С	42	30	25	17	15	15	Yes	Yes	Yes
	D	39	28	22	17	15	15	Yes	Yes	Yes
Duciest 0	А	51	40	34	30	28	28	Yes	Yes	Yes
Project 2	В	51	41	34	36	33	33	Yes	Yes	Yes
Cargo Storage Facility	С	46	33	34	26	24	24	Yes	Yes	Yes
-	D	45	27	27	25	23	23	Yes	Yes	Yes

4.0 Overall Mayfield Concept Plan Noise Levels

4.1 Approach

PON has reviewed the noise verification assessment of all the projects within the MCP, and has collated the 2019 operational compliance noise levels. All individual project compliance results have been combined into the MCP *SoundPLAN Master Model*, which includes all individual projects, to determine the cumulative impacts from approved projects within the MCP.

Table 3 presents a summary of the cumulative compliance noise levels from all approved projects within the MCP.

Table 3 Cumulative compliance noise verification review

Noise Verification Location	Cumu	ative Com	pliance No	oise Emiss	ion Review	/			
	MCP Overall Noise Goals L _{Aeq (Period)}			Predicted Compliance Noise Levels LAeg (Period)			Compliance		
	Day	Evening	Night	Day	Evening	Night	Day	Evening	Night
А	60	49	43	31	29	29	Yes	Yes	Yes
В	60	50	43	38	35	35	Yes	Yes	Yes
С	57	44	45	27	25	25	Yes	Yes	Yes
D	55	37	37	26	24	24	Yes	Yes	Yes

5.0 Discussion and Recommendations

During this year's (2019) annual noise verification review of the MCP, there were two approved operational project within the MCP.

- Project 1 Stolthaven Bulk Liquids Fuel Storage Facility (Stolthaven); and
- Project 2 Mayfield Cargo Storage Facility (Cargo Storage Facility).

Noise emissions from these two projects were assessed against the MCP overall amenity noise goals and compliance was found at all receiver locations, during all assessment periods under all prevailing meteorological conditions. As such, there are no recommendations as a result of the 2019 noise verification review.

AECOM understands that no noise complaints were receiver directly attributable to operations within the MCP over 2019.

6.0 Conclusion

Port of Newcastle Operations Pty Ltd (PON) commissioned AECOM Australia Pty Ltd (AECOM) to carry out their Annual Noise Verification Review for the Mayfield Concept Plan (MCP), Mayfield.

PON has developed and implemented a Noise Verification Monitoring Plan (NVMP) for the MCP, in order to monitor and review individual projects noise emissions against the noise quota issued by PON and then collate and review the cumulative of all operational noise impacts from the overall MCP area.

During this year's (2019) annual noise verification review of the MCP, there were two approved operational project within the MCP.

- Project 1 Stolthaven Bulk Liquids Fuel Storage Facility (Stolthaven); and
- Project 2 Mayfield Cargo Storage Facility (Cargo Storage Facility).

Noise emissions from these projects were assessed against the MCP amenity noise goals to determine the overall impact from approved operations within the MCP.

Compliance was found at all receiver locations, during all assessment periods under all prevailing meteorological conditions.

Appendix A

Acoustic Terminology

Appendix A Acoustic Terminology

The following is a brief description of acoustic terminology that may have been used in this report.

Sound power level	The total sound emitted by a source				
Sound pressure level	The amount of sound at a specified point				
Decibel [dB]	The measurement unit of sound				
A Weighted decibels [dB(A])	The A weighting is a frequency filter applied to measured noise levels to represent how humans hear sounds. The A-weighting filter emphasises frequencies in the speech range (between 1kH and 4 kHz) which the human ear is most sensitive to, and place less emphasis on low frequencies at which the human ear is not sensitive. When an overall sound level is A-weighted it is expressed in units of dB(A).				
Decibel scale	representation of in the sound pre energy. A 10 dB	le is logarithmic in order to produce a better of the response of the human ear. A 3 dB increase assure level corresponds to a doubling in the sound B increase in the sound pressure level corresponds loubling in volume. Examples of decibel levels of a are as follows:			
	0dB(A)	Threshold of human hearing			
	30dB(A)	A quiet country park			
	40dB(A)	Whisper in a library			
	50dB(A)	Open office space			
	70dB(A)	Inside a car on a freeway			
	80dB(A)	Outboard motor			
	90dB(A)	Heavy truck pass-by			
	100dB(A)	Jackhammer/Subway train			
	110 dB(A)	Rock Concert			
	115dB(A)	Limit of sound permitted in industry			
	120dB(A)	747 take off at 250 metres			
Frequency [f]	The repetition rate of the cycle measured in Hertz (Hz). The frequency corresponds to the pitch of the sound. A high frequency corresponds to a high pitched sound and a low frequency to a low pitched sound.				
Equivalent continuous sound level [L_{eq}]	The constant sound level which, when occurring over the same period of time, would result in the receiver experiencing the same amount of sound energy.				
L _{max}	The maximum sound pressure level measured over the measurement period				
L _{min}	The minimum sound pressure level measured over the measurement period				
L ₁₀	The sound pressure level exceeded for 10% of the measurement period. For 10% of the measurement period it was louder than the L_{10} .				

L ₉₀	The sound pressure level exceeded for 90% of the measurement period. For 90% of the measurement period it was louder than the L_{90} .
Ambient noise	The all-encompassing noise at a point composed of sound from all sources near and far.
Background noise	The underlying level of noise present in the ambient noise when extraneous noise (such as transient traffic and dogs barking) is removed. The L_{90} sound pressure level is used to quantify background noise.
Traffic noise	The total noise resulting from road traffic. The L_{eq} sound pressure level is used to quantify traffic noise.
Day	The period from 0700 to 1800 h Monday to Saturday and 0800 to 1800 h Sundays and Public Holidays.
Evening	The period from 1800 to 2200 h Monday to Sunday and Public Holidays.
Night	The period from 2200 to 0700 h Monday to Saturday and 2200 to 0800 h Sundays and Public Holidays.
Assessment background level [ABL]	The overall background level for each day, evening and night period for each day of the noise monitoring.
Rating background level [RBL]	The overall background level for each day, evening and night period for the entire length of noise monitoring.
Weighted sound reduction index [R _w]	A single figure representation of the air-borne sound insulation of a partition based upon the R values for each frequency measured in a laboratory environment.

*Definitions of a number of terms have been adapted from Australian Standard AS1633:1985 *"Acoustics – Glossary of terms and related symbols"*, the EPA's NSW Industrial Noise Policy, Noise Policy for Industry and NSW Road Noise Policy.